

LPG Adjustable Installation Kit

The variable LPG installation kit consists of a jacketed tube with a special LPG float and a 3/4" NPT cutting ring screw.




LPG Installation Kit Variable
(Shown with flange)
for installation of VISY-Stick LPG

Function

The variable LPG installation kit consists of a jacketed tube with a special LPG float and a 3/4" NPT cutting ring screw. The installation length of the jacketed tube is variable and can be set with the cutting ring screw, which can in turn be screwed into the process connection of the tank, e.g. flange or thread (reduction). The exact installation dimensions for the installation of the jacketed tube are no longer required when this installation kit is used. The jacketed tube length can be shortened on-site. The level sensor is placed in the jacketed tube and locked. Now, the level sensor is not located in a pressurised chamber and can be replaced at any time without releasing the pressure in the tank.

LPG Adjustable Installation Kit

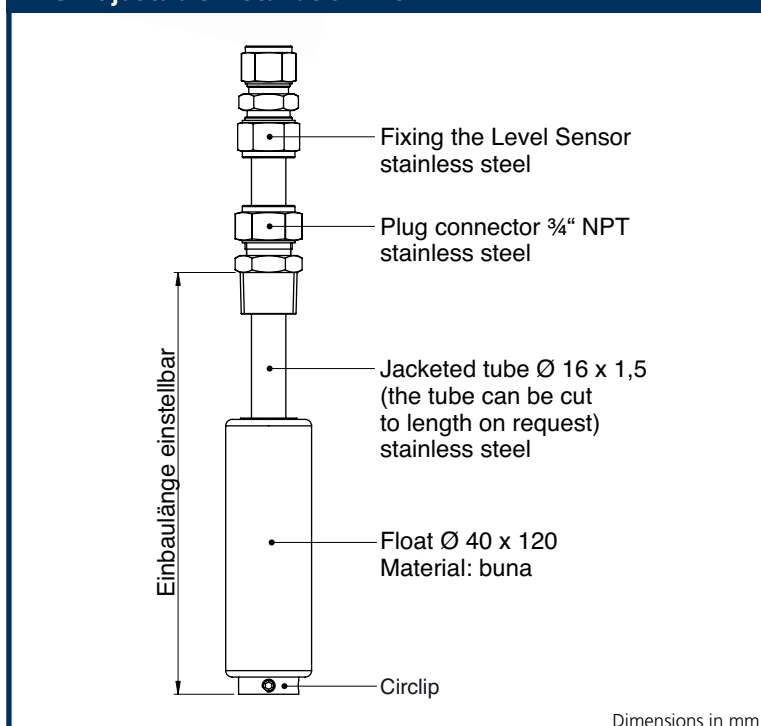

Features of FAFNIR technology

- Variable settings of installation length
- No prior knowledge of installation length required
- Can be shortened on-site
- One-time emptying of tank during installation
- Reduced labour
- Significant cost savings
- Easy installation
- Maintenance-free